


SANITARY TANKS. A WIDE RANGE OF TANKS ADAPTED TO EVERY NEED

Panasonic offers best combination of Aquarea with DHW. The wide range is covered with 1 Tank with buffer tank, 2 Stainless Tanks with energy efficiency class A and 5 Enamelled tanks from 150 to 400L.

New Combo Tank.

The best option to combine with Mono-bloc units. DHW tank with buffer tank. Designed for retrofit applications, the DHW 185l tank with a 80l buffer tank is particularly suitable for fast integration on an existing installation. Panasonic has developed a tank with 80l Buffer tank and 185l sanitary hot water cylinder. This tank includes a 3-way valve and an "A" Class pump. Easy to install, nice looking, high efficiency for DHW production and for heating.

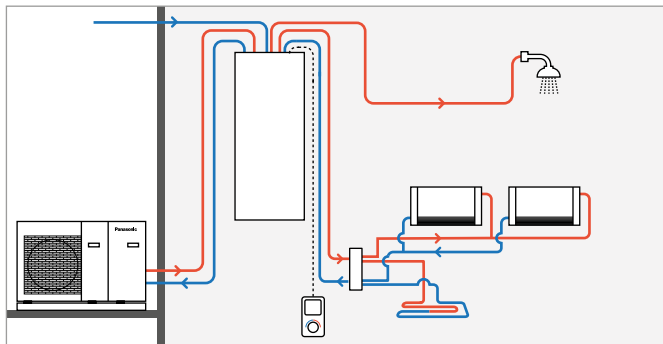

		PAW-TD20B8E3-1
Dimension H x W x D	mm	1770 x 640 x 690
Weight (empty)	kg	150
Volume	L	185
Power supply	V, Phase, Hz	230, 1, 50
Hot water tank		
Volume	L	185
Max working pressure	MPa (bar)	0,8 (8)
Pressure test	MPa (bar)	1,2 (12)
Max working temp	°C	90
Connections	mm	Ø22
Material		S 275 JR vitrified
Insulation	Material, t=mm	PUR, 50
Heating coil surface	m ²	2,1
Electrical heater	W	3000
Energy loss at 65°C	kWh/24h	1,3
Buffer tank		
Volume	L	80
Max working pressure	MPa (bar)	0,6 (6)
Pressure test	MPa (bar)	0,9 (9)
Max working temp	°C	100
Connections	mm	Ø22
Material		S235 JR
Insulation	Material, t=mm	PUR 40mm
ErP data		
		Hot water tank 185
Energy efficiency class (from A+ to F)		B
Standing loss	W	53
Storage volume	L	185
		Buffer tank 80
		B
		46
		80

1) EU Regulation 812/2013, 2) Tested pursuant to EN 12897:2006.

